


Ultraleather[®] Pro— Ultrafabrics[®]

Ultraleather[®] Pro is crafted with passion and purpose. Imbued with optimal durability, protection and ease of care attributes, Pro maintains the Ultraleather[®] reputation as the softest in its class, and is infused with comfort and power combined. Added features include exceptional abrasion resistance, repellency of most stubborn stains like ink, denim dye, red wine, mustard and iodine- based liquids, along with EPA-registered antimicrobial protection. An extensive color palette provides numerous options for upholstery applications.

Distinctive Features

- Superior durability — industry-leading 14+ weeks hydrolysis results
- Reinforced Rayon Backing
- EPA-Registered Antimicrobial Protection does not contain Triclosan and Triclocarban
- Enhanced resistance to tough stains including ballpoint pen, denim dye, and ketchup
- Bleach cleanable (1:5 bleach/water solution)

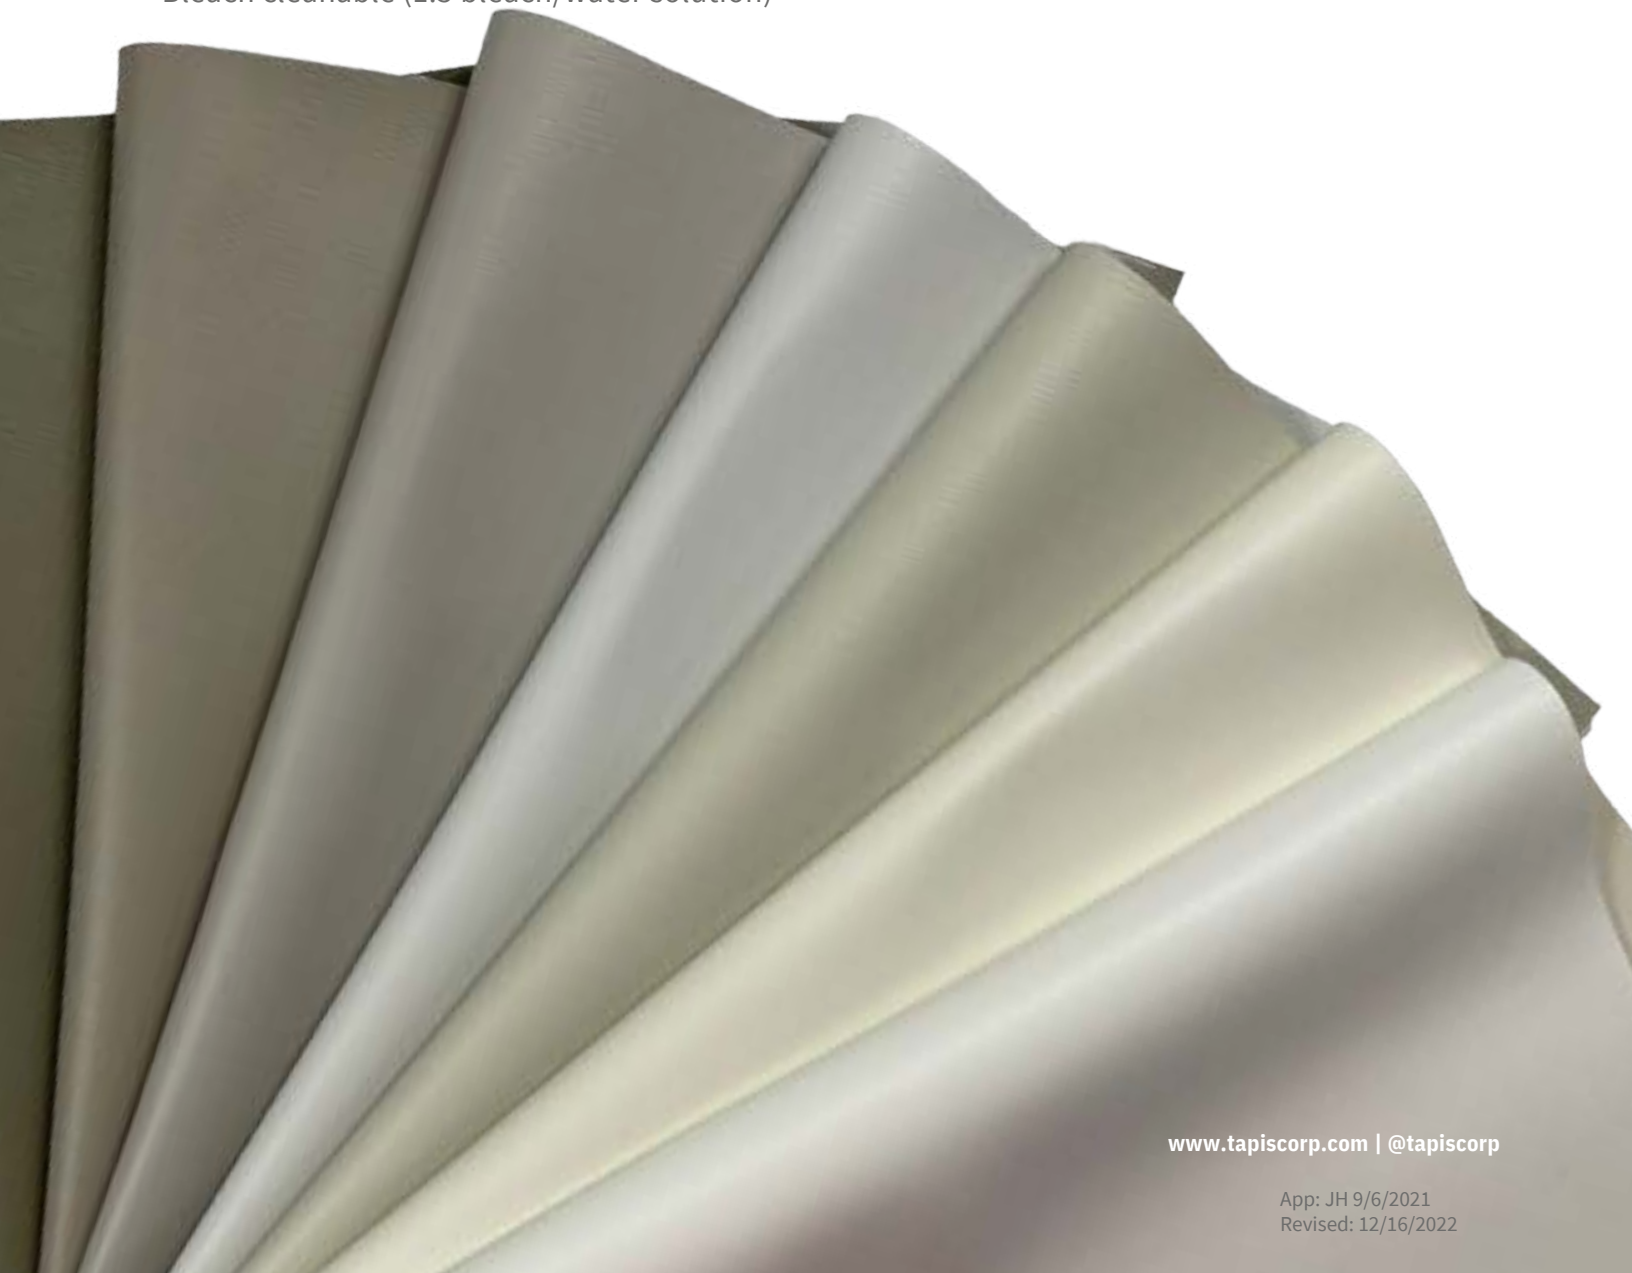

UltraLeather® Pro— Ultrafabrics®



Specifications

Description

Lightweight faux leather with ink and stain resistant technology

Composition

Proprietary FR treatment, 100% Polyurethane Surface, 100% Reinforced Rayon Backcloth

General

Roll Size: 33 yards (+/- 10%)

Width: 54" (+/- 10%)

Weight: 11.33 oz/sq. yd, 384 g/sm (+/- 10%)

Thickness: .041", .96mm (+/- 10%)

Stretch Percent: 5% Warp, 25% Fill

Set Percent: 2% Warp, 5% Fill

**also includes EPA-Registered antimicrobial protection*

ULPROFR Meets:

Test	Method
60 second Vertical Burn Test	FAR 25.853(a) Appendix F, Part I,(a), 1(i):60sec
12 Second Vertical Burn	FAR 25.853(a) Appendix F, Part I,(a), 1(ii):12sec
Seat Cushion with Fireblock	FAR 25.853 (b) Appendix F, Part II
Abrasion Test	ASTM D4157 Wyzenbeek method 500,000 double rubs
Breaking Force	ASTM D5034: Warp- 85, Fill- 70
Colorfastness to Light	AATCC 16.3, 200 hours Grade 4-5
Colorfastness to Crocking	AATCC 8: Grade 5