


# Ultraleather<sup>®</sup>— Ultrafabrics<sup>®</sup>

Ultraleather<sup>®</sup> offers ultimate classic styling, redefining the experience of leather. This leading performance fabric is highlighted by a natural grain appearance and an extensive color offering, providing limitless design options. Unrivaled softness and an understated look combined with pioneering technology is implicit in this intelligent signature material that is proven to endure.

## Distinctive Features

- Superior durability — industry-leading 14+ weeks hydrolysis results
- Reinforced Rayon Backing
- Bleach cleanable (1:5 bleach/water solution)

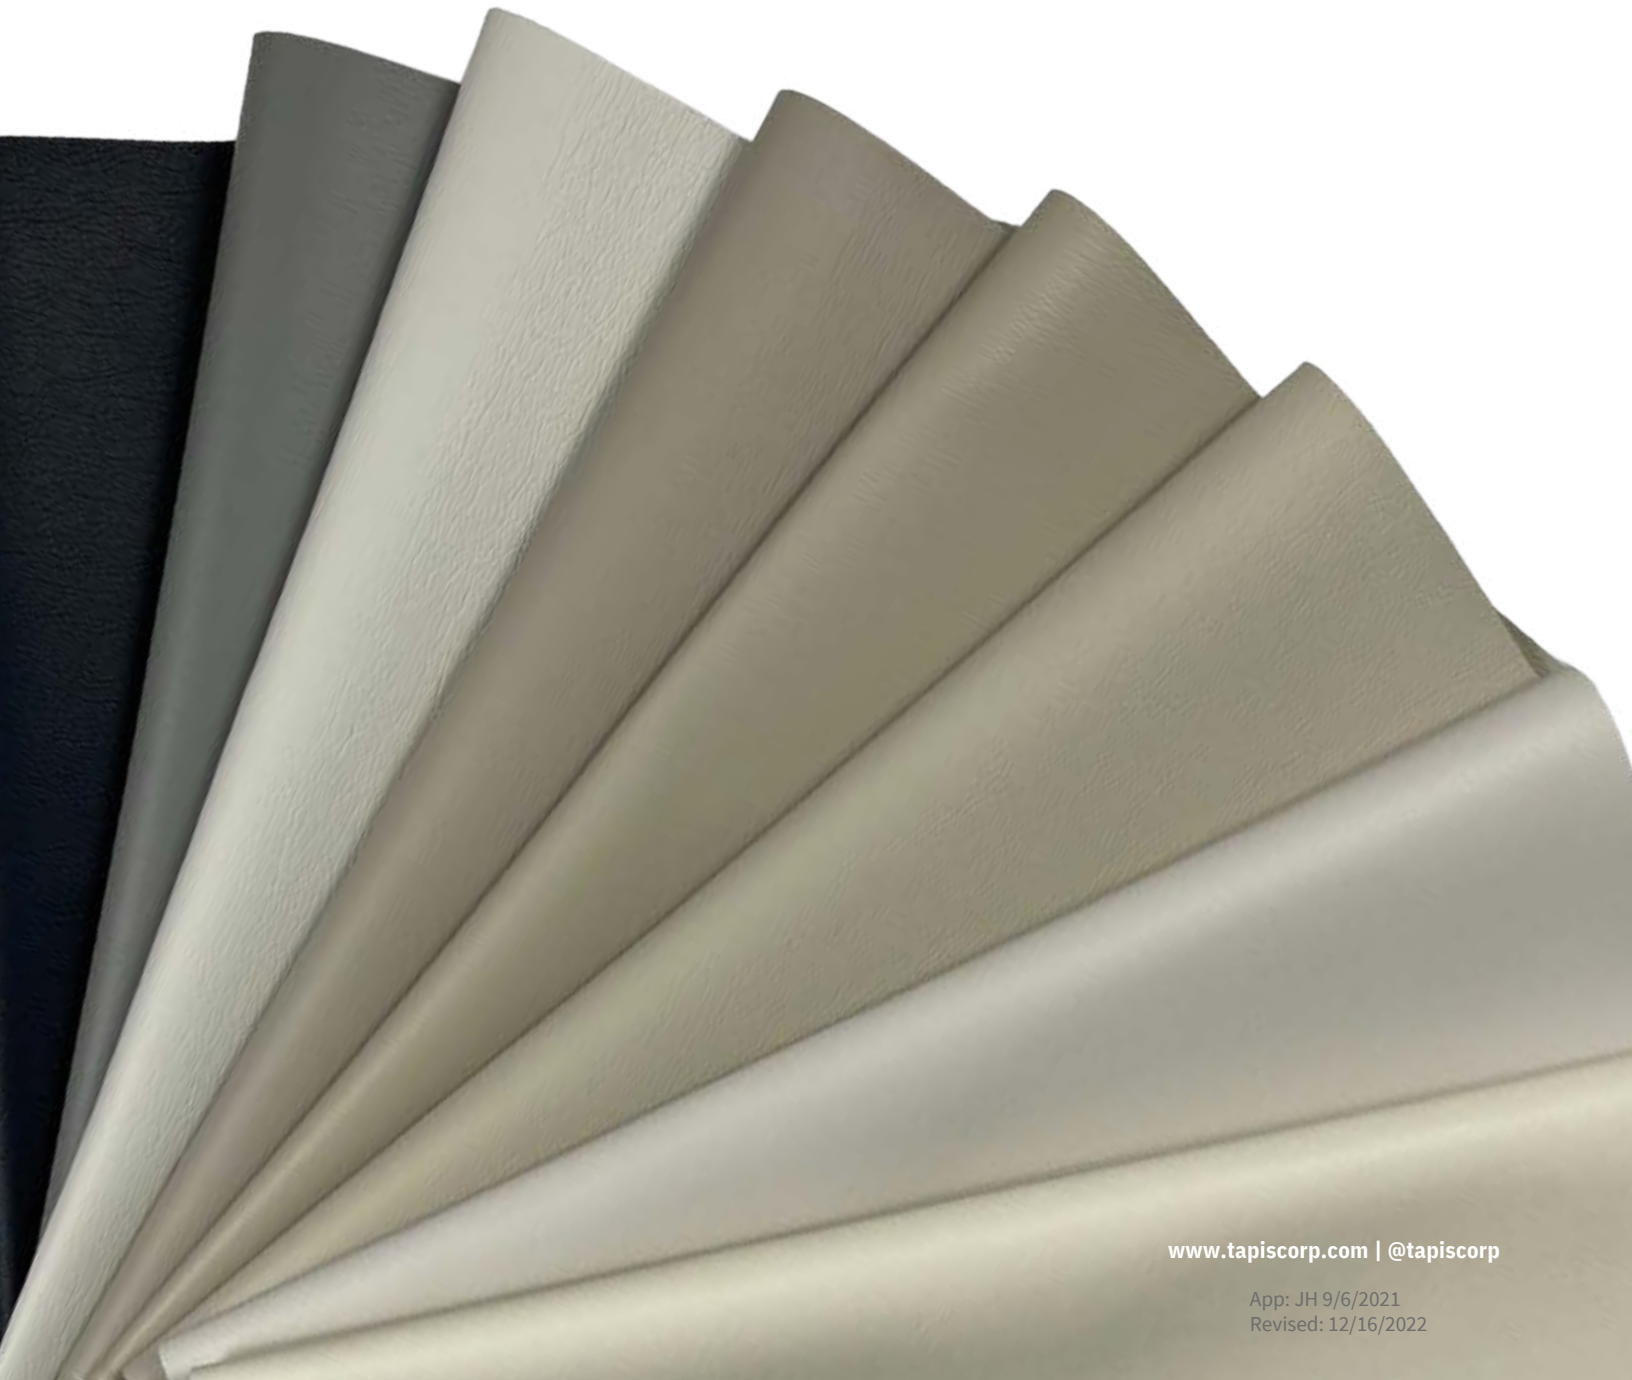



## Specifications

### Description

Lightweight faux leather

### Composition

Proprietary FR treatment, 100% Polyurethane Surface, 100% Reinforced Rayon Backcloth

### General

Roll Size: 33 yards (+/- 10%)

Width: 54" (+/- 10%)

Weight: 11.33 oz/sq yd / 383 g/sm (+/- 10%)

Thickness: .99 mm / .039" (+/- 10%)

Stretch Percent: 1.2% Warp, 24.2% Fill

Set Percent: .3% Warp, 2.8% Fill

### ULFR Meets:

Test	Method
60 second Vertical Burn Test	FAR 25.853(a) Appendix F, Part I,(a), 1(i):60sec
12 Second Vertical Burn	FAR 25.853(a) Appendix F, Part I,(a), 1(ii):12sec
Seat Cushion with Fireblock	FAR 25.853 (b) Appendix F, Part II
Abrasion Test	ASTM D4157 Wyzenbeek method 400,000 double rubs
Breaking Force	ASTM D5034: Warp- 99.7, Fill- 84.3
Colorfastness to Light	AATCC 16.3, 200 hours Grade 4-5
Colorfastness to Crocking	AATCC 8: Grade 5