

SPECIFICATIONS

Description: Fusion bonded carpet for walls and floors

Composition: 80% natural goat hair, 15% nylon, 5% viscose

Rib Direction: Rib runs across width of the carpet

Width: 6'7" / 2 meters (+/- 5%)

Weight: 92.96 oz/sq yd / 3,151 g/sq m (+/- 5%)

TESTING

Meets:

Flame & Smoke Resistance: Critical Radiant Flux: ASTM E648 – Type 1

Colorfastness to Light: AATCC16 – 5

Piling & Fuzzing: DuPont Tumble Method –4.5

Vertical Burn, 12 Second: FAR 25.853(a) Appendix F, Part I(a), 1(ii):12 sec

CLEANING & CARE


Maintenance on walls:

Remove spots and stains with any reputable commercial dry cleaning solvent. Apply solvent to area and blot (never rub) with clean absorbent cloth or paper towel. Periodically vacuum surface in both directions using upholstery cleaning attachment with upright or canister vacuum cleaner. To remove dust or fluff build-up, use a whiskbroom or other medium-bristle brush to brush briskly but lightly in the direction of the ribs.

Maintenance on floors:

Spills should be blotted, not rubbed. If stain appears when dry, apply dry cleaning solvent and blot dry.

Damaged or permanently stained areas may be cut out and neatly replaced with new patches. Tretford should be vacuumed daily with a pile-agitation vacuum cleaner.

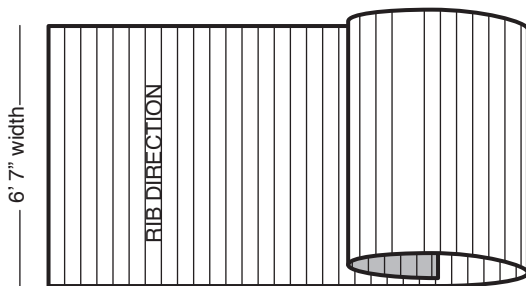

Ribs run across width of carpet